

Stop End

Quickly and easily cap off MDPE pipework (temporary or permanent installation)

Overview

Speedfit plastic push-fit fitting that quickly and easily caps off MDPE pipework at termination points on a temporary or permanent basis. The uniquely designed fitting incorporates stainless teeth to provide a tight and secure grip on the pipe.

Simply push the fitting fully onto the pipe. The connection is demountable, making it easy to work with in the ground when maintaining or altering an existing set-up.

Designed, manufactured and assembled in the UK.

Features & Benefits

- Instant push-fit connection
- Install and demount in seconds without tools
- Stainless steel teeth grab ring provides extra grip on the pipe
- Durable material with high impact resistance
- Non-toxic and no scale build-up
- Resists corrosion and biological growth
- Compatible with MDPE pipes only (inserts required)
- Suitable for cold water use only



Product code	Description	Size	Bag QTY
UG4620B	Cold Water Service Stop End	20mm	1
UG4625B	Cold Water Service Stop End	25mm	1



Stop End


Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	16

Materials

Body	Polypropylene (Glass Filled), Black
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Acetal Copolymer (Unfilled) Blue
Collet Teeth	Stainless Steel
Collet Cover	Acetal Copolymer (Unfilled) Blue
Support Washer	Acetal Copolymer (Unfilled) Blue

Dimensions – All measurements in mm unless otherwise stated

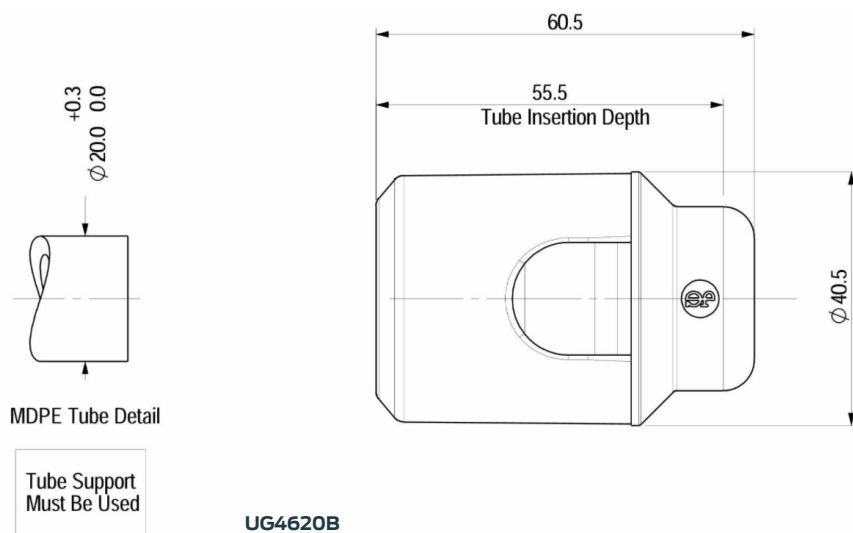

Working Pressures and Temperatures

Max Temperature 20 °C Max Pressure 16 bar

