



# JG Speedfit 4-Way Manifold


## Working parameters & specifications

| Application                              | Usual working temperature °C | Maximum working temperature °C     | Maximum working pressure, bar |
|--|------------------------------|------------------------------------|-------------------------------|
| Cold Water (indirect and direct mains)   | 20                           | 20                                 | 12                            |
| Central Heating                          | 82                           | 105, short term malfunction at 114 | 3                             |
| Hot Water (including unvented cylinders) | 65                           | 95                                 | 6                             |

## Materials

|                     |   |
|---------------------|---|
| <b>Body</b>         | X-Linked Polyethylene, White                |
| <b>O-Ring</b>       | Ethylene Polypropylene Diene Monomer (EPDM) |
| <b>Collet</b>       | Glass Filled Nylon                          |
| <b>Collet Teeth</b> | Stainless Steel 301                         |
| <b>Caps</b>         | Nylon 66 (40% Mineral Filled), White        |

## Dimensions – All measurements in mm unless otherwise stated

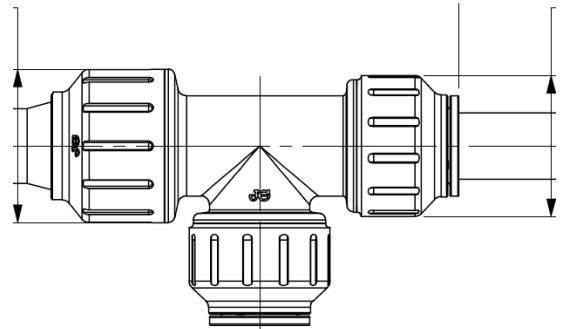

## PLASCE HOLDER - SOURCING FROM THEREFORE

| Product code | A           | B  | C    | D  | Za | Zb | Zc | B  |
|--------------|-------------|----|------|----|----|----|----|----|
| 15TB         | 15mm x 1/2" | 46 | 47.5 | 85 | 30 | 18 | 15 | 15 |