

JG Speedfit Brass Female Stem Adaptor


Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Central Heating	82	105, short term malfunction at 114	3
Hot Water (including unvented cylinders)	65	95	6

Materials

Body	X-Linked Polyethylene, White
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Glass Filled Nylon
Collet Teeth	Stainless Steel 301
Caps	Nylon 66 (40% Mineral Filled), White

Dimensions – All measurements in mm unless otherwise stated

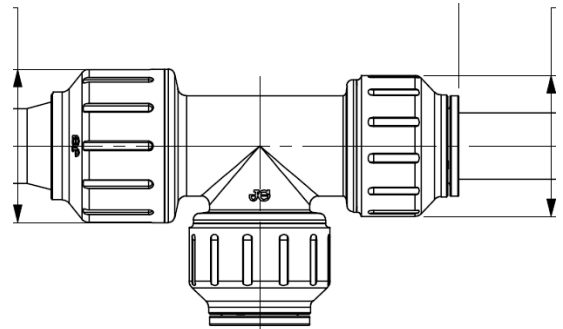

PLASCE HOLDER - SOURCING FROM THEREFORE

Product code	A	B	C	D	Za	Zb	Zc	B
15TB	15mm x 1/2"	46	47.5	85	30	18	15	15