

# JG Speedfit x Union Nut

Connects a supply to a tap or other fixture or appliance

## Overview

Speedfit push-fit flexi hose for the connection of pipe to a male thread appliance, such as a tap. Simply push the fitting fully onto the pipe and screw the nut onto the thread of the appliance. To demount the push-fit end, push the collet towards the body of the fitting and pull the pipe release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works or tools.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- An alternative to hard piping to a tap or fixture
- Flexible design makes installation hassle free
- Safe flame-free installation, with no hot works, glue or flux
- Braided stainless steel outer layer protects the internal feed from damage
- Grip & Seal cartridge with stainless steel teeth and main O-Ring seal
- Compatible with plastic or copper pipes (inserts required)
- Suitable for hot and cold water only (6 Bar @ 65 °C)



Product code	Description	Size	Pack QTY
150mm			
<b>FLX43P</b>	Speedfit x Union Nut	15mm x 1/2" BSP	1
<b>FLX34P</b>	Speedfit x Union Nut	10mm x 1/2" BSP	1
<b>FLX35P</b>	Speedfit x Union Nut	15mm x 3/8" BSP	1
<b>FLX15P</b>	Speedfit x Union Nut	15mm x 1/2" BSP	1
<b>FLX16P</b>	Speedfit x Union Nut	15mm x 3/4" BSP	1
<b>FLX22P</b>	Speedfit x Union Nut	22mm x 3/4" BSP	1
<b>FLX18P</b>	Speedfit x Union Nut	15mm x 1/2" BSP	1
<b>FLX20P</b>	Speedfit x Union Nut	15mm x 3/4" BSP	1
<b>FLX19P</b>	Speedfit x Union Nut	22mm x 3/4" BSP	1
<b>FLX23P</b>	Speedfit x Union Nut	22mm x 3/4" BSP	1
<b>FLX40P</b>	Speedfit x Union Nut	15mm x 1/2" BSP	1
<b>FLX42P</b>	Speedfit x Union Nut	15mm x 3/4" BSP	1
<b>FLX41P</b>	Speedfit x Union Nut	22mm x 3/4" BSP	1



50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes

# JG Speedfit x Union Nut


## Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Central Heating	82	105, short term malfunction at 114	3
Hot Water (including unvented cylinders)	65	95	6

## Materials

<b>Body</b>	X-Linked Polyethylene, White
<b>O-Ring</b>	Ethylene Polypropylene Diene Monomer (EPDM)
<b>Collet</b>	Glass Filled Nylon
<b>Collet Teeth</b>	Stainless Steel 301
<b>Caps</b>	Nylon 66 (40% Mineral Filled), White

## Dimensions – All measurements in mm unless otherwise stated

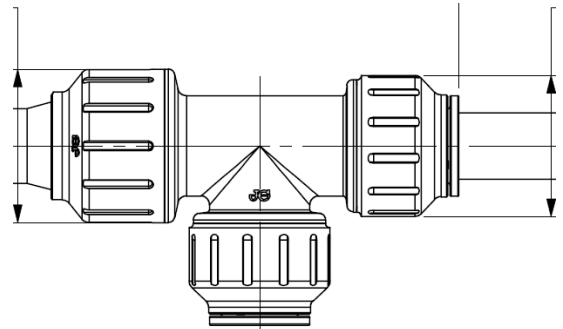

### PLASCE HOLDER - SOURCING FROM THEREFORE

Product code	A	B	C	D	Za	Zb	Zc	B
15TB	15mm x 1/2"	46	47.5	85	30	18	15	15