


Straight Connector

Working parameters & specifications

Application	Maximum working pressure, bar
Air	16 Bar (4-8mm) / 10 Bar (8-28mm)

Materials	
Body	Acetal Copolymer (Unfilled), Black
O-Ring	Nitrile, Black
Collet	Acetal Copolymer (Unfilled), Black
Collet Teeth	Stainless Steel 301

Dimensions – All measurements in mm unless otherwise stated

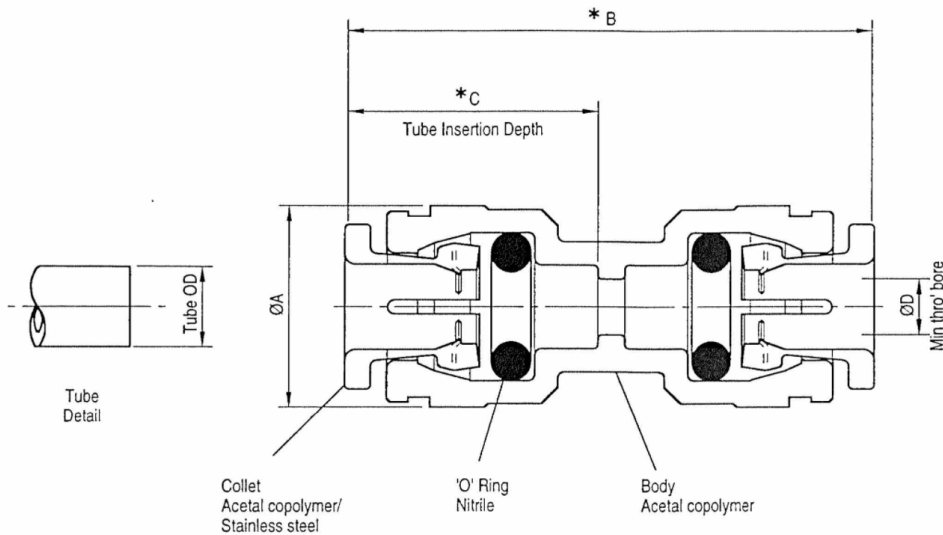

* With collet in fully released position

Product No.	Tube O/D	Tube O/D Tol	ØA	$\ast B$	$\ast C$	ØD
RM0404E	4.0	+0.05 / -0.07	12.3	30.2	14.3	3.4
RM0405E	5.0	+0.05 / -0.07	12.3	30.2	14.3	3.4
RM0406E	6.0	+0.05 / -0.10	13.9	33.2	15.8	4.8
RM0408E	8.0	+0.05 / -0.10	16.0	35.4	16.9	6.4
RM0410E	10.0	+0.05 / -0.10	19.4	41.6	19.9	7.6
RM0412E	12.0	+0.05 / -0.10	22.3	53.7	25.9	8.7

Dimensions in mm unless stated otherwise