

Grey Acetal Straight Adaptor (BSPT Thread)

Quickly and easily converts an imperial push-fit connection to an imperial threaded connection

Overview

John Guest grey push-fit acetal straight adaptor (BSPT thread) fitting converts metric pipe to an imperial BSPT type thread for connection to a fitting, fixture or appliance. Fast and simple to install, John Guest push-fit fittings create an instant push-fit connection and leak tight seal without the need for tools, hot works or sealing agents.

The unique collet locking design firmly and securely holds the pipe in place without deforming the pipe or restricting flow. Fittings are corrosion resistant and fully demountable, improving system performance and reducing system downtime during maintenance.

Manufactured in grey push-fit acetal copolymer, the fitting is suitable for foodstuff, potable liquids and inert gases. In accordance with the British Beer & Pub Association Code of Practice, fittings can also be used with N₂/CO₂ and mixed gas dispense lines, as well as air, pneumatic and vacuum applications. All John Guest fittings are manufactured and assembled in the UK.

Features & Benefits

- Plastic push-fit adaptor for converting to imperial BSPT threads
- Rigid and hardwearing acetal copolymer material
- Food grade material suitable for foodstuff, potable liquids, inert gases, air, pneumatic and vacuum
- Instant push-fit connection and leak tight seal
- Connect, disconnect and reconnect in seconds without tools
- No scale build up improves performance and equipment lifespan
- Superior flow characteristics
- Compatible with LLDPE or soft metal pipe/tube



Product code	Description	Size	Bag QTY
PM010401S	Straight Adaptor (BSPT Thread)	5/32" x 1/8"	10
PM010402S	Straight Adaptor (BSPT Thread)	5/32" x 1/4"	10
PI010601S	Straight Adaptor (BSPT Thread)	3/16" x 1/8"	10
PI010602S	Straight Adaptor (BSPT Thread)	3/16" x 1/4"	10
PI010801S	Straight Adaptor (BSPT Thread)	1/4" x 1/8"	10
PI010802S	Straight Adaptor (BSPT Thread)	1/4" x 1/4"	10
PM010801S	Straight Adaptor (BSPT Thread)	5/16" x 1/8"	10
PM010802S	Straight Adaptor (BSPT Thread)	5/16" x 1/4"	10
PM010803S	Straight Adaptor (BSPT Thread)	5/16" x 3/8"	10
PI011202S	Straight Adaptor (BSPT Thread)	3/8" x 1/4"	10
PI011203S	Straight Adaptor (BSPT Thread)	3/8" x 3/8"	10
PI011603S	Straight Adaptor (BSPT Thread)	1/2" x 3/8"	10
PI011604S	Straight Adaptor (BSPT Thread)	1/2" x 1/2"	10




Grey Acetal Straight Adaptor (BSPT Thread)

Application	Maximum & Minimum Temperature	Maximum working pressure, bar
Potable Liquid	1°C -65°C	16 Bar (7 Bar @ 65°C)

Materials	
Body	Plastic
O-Ring	Nitrile, Black
Collet	Acetal Copolymer (Unfilled)
Collet Teeth	Stainless Steel 301

Application
Potable Liquid
Food Grade Liquid
Inert Gases
Vacuum

Dimensions – All measurements in mm unless otherwise stated

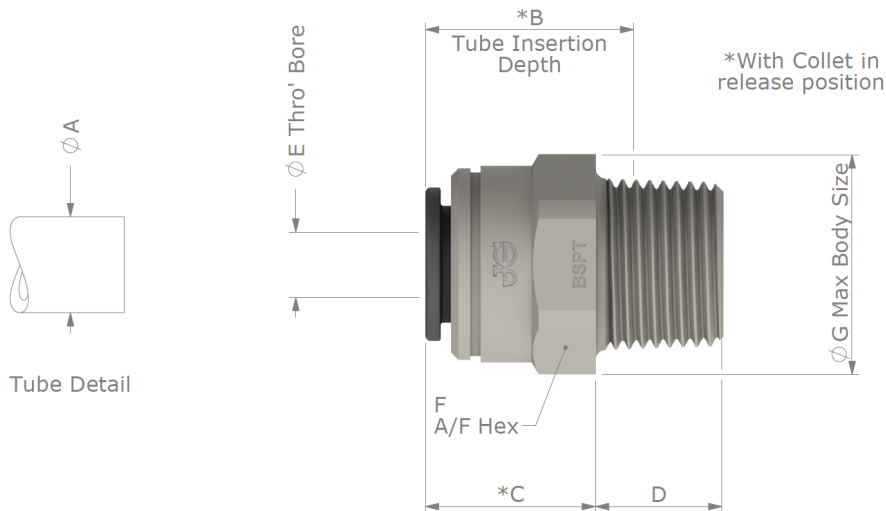

Product No.	Size	A Tube O/D	B	C	D	E	F	G
PM010401S	5/32" x 1/8 BSPT	0.156 +0.001 / -0.003 [3.97 +0.03 / -0.07]	0.56 [14.3]	0.60 [15.1]	0.40 [10.2]	0.10 [2.5]	0.59 [15.0]	0.66 [16.7]
PM010402S	5/32" x 1/4 BSPT		0.56 [14.3]	0.56 [14.1]	0.44 [11.2]	0.10 [2.5]	0.67 [17.0]	0.72 [18.3]
PI010601S	3/16" x 1/8 BSPT	0.188 +0.001 / -0.003 [4.76 +0.03 / -0.07]	0.56 [14.3]	0.60 [15.1]	0.40 [10.2]	0.12 [3.0]	0.59 [15.0]	0.66 [16.7]
PI010602S	3/16" x 1/4 BSPT		0.55 [14.0]	0.56 [14.1]	0.44 [11.2]	0.12 [3.0]	0.67 [17.0]	0.72 [18.3]
PI010801S	1/4" x 1/8 BSPT	0.250 +0.001 / -0.004 [6.35 +0.03 / -0.10]	0.62 [15.7]	0.54 [13.7]	0.40 [10.2]	0.15 [3.8]	0.67 [17.0]	0.72 [18.3]
PI010802S	1/4" x 1/4 BSPT		0.62 [15.7]	0.54 [13.7]	0.44 [11.2]	0.18 [4.5]	0.67 [17.0]	0.72 [18.3]
PM010801S	5/16" x 1/8 BSPT	0.313 +0.001 / -0.004 [7.94 +0.03 / -0.10]	0.66 [16.7]	0.73 [18.5]	0.40 [10.2]	0.16 [4.1]	0.67 [17.0]	0.72 [18.3]
PM010802S	5/16" x 1/4 BSPT		0.66 [16.7]	0.55 [14.0]	0.44 [11.2]	0.25 [6.3]	0.67 [17.0]	0.72 [18.3]
PM010803S	5/16" x 3/8 BSPT		0.66 [16.7]	0.56 [14.2]	0.50 [12.7]	0.27 [6.8]	0.79 [20.0]	0.86 [21.8]
PI011202S	3/8" x 1/4 BSPT	0.375 +0.001 / -0.004 [9.53 +0.03 / -0.10]	0.78 [19.7]	0.84 [21.2]	0.44 [11.2]	0.23 [5.8]	0.79 [20.0]	0.86 [21.8]
PI011203S	3/8" x 3/8 BSPT		0.78 [19.7]	0.68 [17.2]	0.50 [12.7]	0.26 [6.5]	0.79 [20.0]	0.86 [21.8]
PI011603S	1/2" x 3/8 BSPT	0.500 +0.001 / -0.004 [12.70 +0.03 / -0.10]	0.91 [23.0]	1.06 [26.9]	0.50 [12.7]	0.34 [8.6]	0.94 [24.0]	1.03 [26.3]
PI011604S	1/2" x 1/2 BSPT		0.91 [23.0]	0.71 [18.0]	0.63 [16.0]	0.34 [8.6]	0.94 [24.0]	1.03 [26.3]