

Polypropylene Plug

Plugs an unused port on a John Guest push-fit fitting

Overview

John Guest push-fit polypropylene plug is for plugging unused connection ports on a John Guest fitting. All John Guest fittings are manufactured and assembled in the UK.



Features & Benefits

- Compatible with John Guest fittings only
- Suitable for potable water, intermittent hot water (up to 65°C max) and water treatment and purification applications
- Not suitable for compressed air or vacuum applications

Product Code	Description	Size
PP0808W	Plug	1/4"
PPM0808W	Plug	5/16"
PP0812W	Plug	3/8"
PP0816W	Plug	1/2"




Polypropylene Plug

Application	Maximum working temperature °C	Maximum working pressure, bar
Potable Water	20	10
Intermittent Hot Water	60	4

Materials	
Body	Polypropylene

Application
Potable Liquid
Water Treatment & Purification
Not Suitable for Compressed Air & Vacuum

Dimensions – All measurements in mm unless otherwise stated

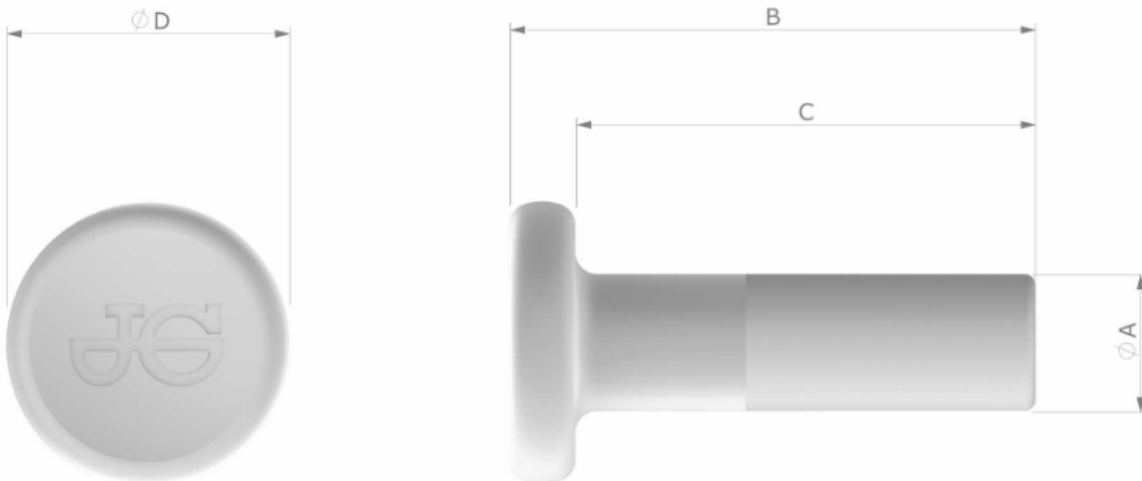

Product No.	Colour	Ø A Size	B	C	D
PP0808W	White	1/4"	1.18 [30.0]	1.03 [26.2]	0.60 [15.2]
PP0812W	White	3/8"	1.43 [26.3]	1.25 [31.8]	0.77 [19.6]
PP0812E	Black				
PP0816W	White	1/2"	1.51 [38.3]	1.32 [33.6]	0.85 [21.6]

Dimensions in Inches & [mm]