Drinks Dispense & Water Treatment



Superseal Straight Adaptor (MFL Thread)

Quickly and securely connects stainless steel and polished metal pipe/tube to a MFL type connection

Overview

John Guest superseal straight adaptor (MFL Thread) fitting connects stainless steel and other polished metal pipe/tube to a MFL type connection. Fast and simple to install, John Guest push-fit fittings create an instant push-fit connection and leak tight seal without the need for tools, hot works or sealing agents.

The unique collet locking design firmly and securely holds the pipe in place without deforming the pipe or restricting flow. The superseal provides extra grip and the hand-operated nut and wedge plastic washer applies pressure on the collet and double nitrile O-Rings, ensuring the stainless-steel teeth bite firmly onto the pipe, while compressing the O-Rings to enhance the seal.

The fittings are manufactured from acetal, are corrosion resistant and fully demountable, improving system performance and reducing system downtime during maintenance. Manufactured in grey push-fit acetal copolymer, the fitting is suitable for potable liquids, foodstuff, inert gas and intermittent hot water applications. All John Guest fittings are manufactured and assembled in the UK.

Features & Benefits

- Nitrile food grade O-ring for potable liquids and foodstuff (not suitable for air, pneumatic or vacuum applications)
- Superseal feature provides extra grip on stainless steel and other hard polished metal pipe/tube
- Instant push-fit connection with hand-tighten nut for added compression
- Connect, disconnect and reconnect in seconds without tools
 No scale build up improves performance and equipment lifespan
- Superior flow characteristics
- Product Code
 Description
 Size

 SM0108F4S
 Straight Adaptor
 5/16" 1/4"









Superseal Straight Adaptor (MFL Thread)

| Application | Maximum working temperature °C | Maximum working pressure, bar | |
|------------------------|--------------------------------|----------------------------------|--|
| Potable Water | 20 | 10 | |
| Intermittent Hot Water | 60 | 4 | |
| | | | |
| Materials | Application | | |


| Materiats | |
|--------------|---------------------|
| Body | Acetal Copolymer |
| O-Ring | Nitrile |
| Collet | Acetal Copolymer |
| Collet Teeth | Stainless Steel 301 |

Application Potable Liquid

Food Grade Liquids

Not Suitable for Compressed Air & Vacuum

Dimensions – All measurements in mm unless otherwise stated

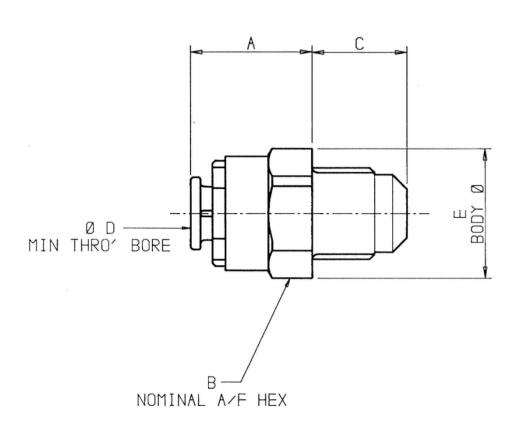

| PRODUCT NO. | DESCRIPTION | A | В | С | ØD | ØE |
|-------------|--------------------------|------|-------|------|------|------|
| · SM0108F4S | 5/16 SUPERSEAL x 1/4 MFL | 0.98 | 13⁄16 | 0.56 | 0.18 | 0.89 |
| SM0108F6S | 5/16 SUPERSEAL x 3/8 MFL | 0.82 | 13/16 | 0.64 | 0.23 | 0.89 |