## **Drinks Dispense & Water Treatment**



# White Polypropylene Equal Straight Connector

### Quickly and easily connects two equal sized pipes

#### Overview

John Guest white polypropylene push-fit equal straight connector fitting connects two equal sized metric pipes/tubes. Fast and simple to install, John Guest push-fit fittings create an instant push-fit connection and leak tight seal without the need for tools, hot works or sealing agents.

The unique collet locking design firmly and securely holds the pipe in place without deforming the pipe or restricting flow. Fittings are corrosion resistant and fully demountable, improving system performance and reducing system downtime during maintenance.

Manufactured in polypropylene with EPDM seals, the fitting offers greater chemical resistance than push-fit acetal and is suitable for potable water (10 bar at 20°C) and intermittent hot water applications (4 bar at 60°C), including water treatment applications. All John Guest fittings are manufactured and assembled in the UK.



#### **Features & Benefits**

- Polypropylene material and EPDM O-Ring offers high chemical resistance
- Suitable for potable water, intermittent hot water (up to 65°C max) water treatment and purification applications (Not suitable for compressed air or vacuum applications)
- Instant push-fit connection and leak tight seal
- Connect, disconnect and reconnect in seconds without tools
- No scale build up improves performance and equipment lifespan
- Superior flow characteristics
- Compatible with LLDPE or soft metal pipe/tube

Product Code	Description	Size
PPM0408W	Equal Straight Connector	8mm
PPM0412W	Equal Straight Connector	12mm








# White Polypropylene Equal Straight Connector

Application	Maximum working temperature °C	Maximum working pressure, bar		
Potable Water	20	10		
Intermittent Hot Water	60	4		

Materials	
Body	Polypropylene
O-Ring	EPDM
Collet	Polypropylene
Collet Teeth	Stainless Steel 301

Application
Potable Liquid
Water Treatment & Purification
Not Suitable for Compressed Air & Vacuum

#### **Dimensions** – All measurements in mm unless otherwise stated

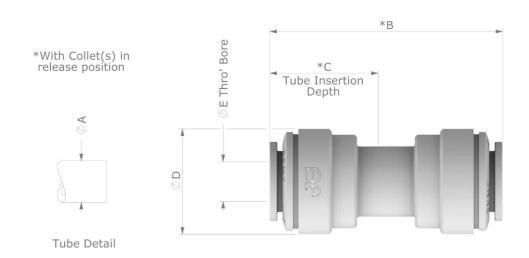

Product No.	Colour	Size	A Tube O/D	В	С	D	Ε
PP0408W	White	1/4"	1/4" 0.250 +0.001 / -0.004 [6.35 +0.03 / -0.10]	1.30 [33.0]	0.62 [15.7]	0.64 [16.3]	0.17 [4.3]
PP0408E	Black						
PPM0408W	White	5/16"	5/16" 0.313 +0.001 / -0.004 [7.94 +0.03 / -0.10]	1.39 [35.2]	0.66 [16.7]	0.75 [19.0]	0.25 [6.3]
PPM0408E	Black						
PP0412W	White	3/8"	0.375 +0.001 / -0.004	1.68	0.78	0.80	0.30
PP0412E	Black		[9.53 +0.03 / -0.10]	[42.6]	[19.8]	[20.2]	[7.6]
PP0416W	White	1/2"	0.500 +0.001 / -0.004 [12.70 +0.03 / -0.10]	1.98 [50.4]	0.93 [23.7]	0.98 [24.8]	0.38 [9.7]

Dimensions in Inches & [mm]